


REVISIONS				
ZONE	SYM	DESCRIPTION	DATE	APPROVED
	-	INITIAL RELEASE	7-18-17	MRG

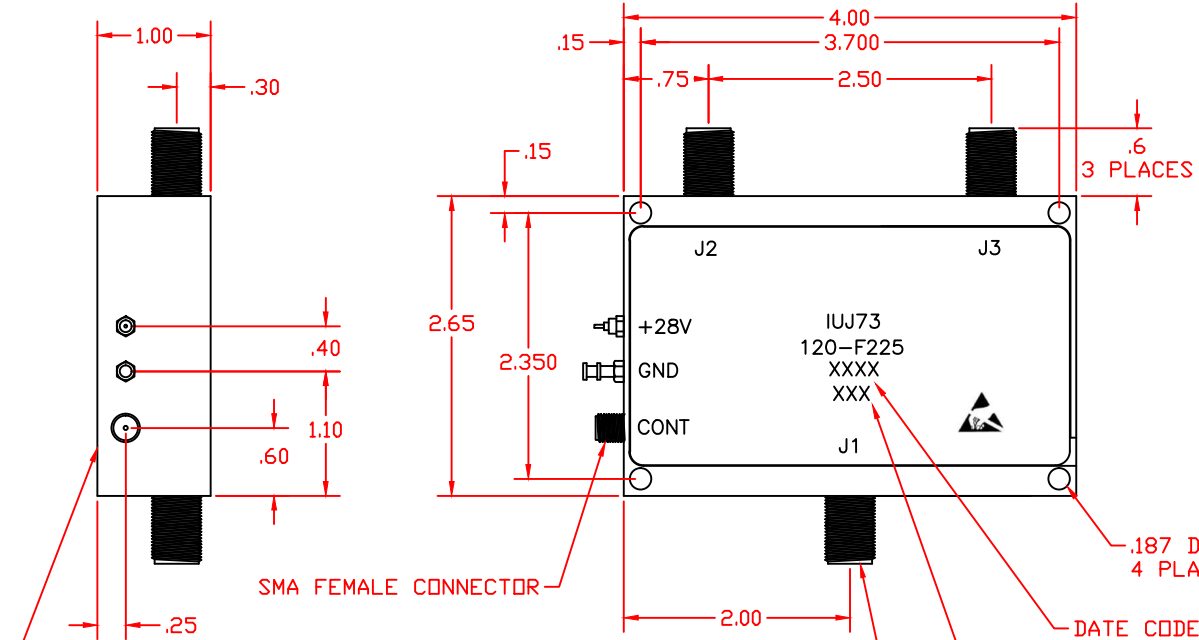

**SPECIFICATIONS**  
 FREQUENCY: 2-4 GHz  
 ISOLATION: 40 dB MIN.  
 INSERTION LOSS: 1.0 dB MAX  
 VSWR: 1.8:1  
 POWER: 200 WCW  
 SWITCHING SPEED: 1 MICROSEC MAX

TTL	INSERTION LOSS PATH
0	J1-J2
1	J1-J3

**CAUTION**  
 STATIC SENSITIVE MATERIAL  
 ALL HANDLING/INSPECTION TO BE PERFORMED  
 ONLY AT APPROVED WORK STATIONS

- NOTES:**
- FINISH: WASH PRIMER PER DDD-P-15328D  
 PRIMER PER MIL-P-23377D  
 PAINT PER MIL-C-22750  
 COLOR: BLUE  
 MOUNTING SURFACE: GOLD PLATE PER MIL-G-45204C, TYPE 3, GRADE A
  - MARKING: BLACK EPOXY INK .12 HIGH CHARACTERS  
 PER MIL-STD-130

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF RH LABS AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON FINISHES: .063 ANGLES: ±1/2° FRACTIONS: 1/64 3 PLACE DECIMALS: ±.010 2 PLACE DECIMALS: ±.02 1 PLACE DECIMALS: ±.1 FILLETS: .005R MAX REMOVE BURRS AND SHARP EDGES TO .005 MAX. R OR CHAMFER	DRAFT CHKD MRG	DATE 7-18-17
	PROD ENGR	
	QA	

TITLE		OUTLINE SPDT SWITCH	
SIZE B	CAGE CODE IUJ73	DWG NO 120-F225	
SCALE 1/1	SHEET 1 OF 1		