

4


3

2

1

REVISIONS				
ZONE	SYM	DESCRIPTION	DATE	APPROVED
	-	INITIAL RELEASE	7-18-17	MRG

RF INPUT
SMA MALE PER
MIL-STD-348 AND
MIL-C-39012

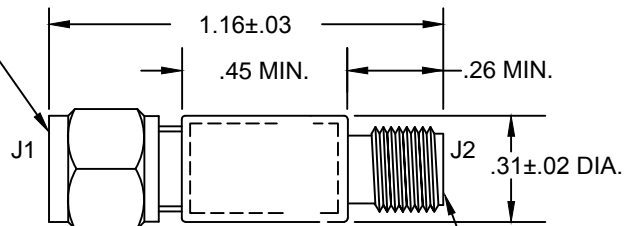

VIDEO OUTPUT
SMA FEMALE
MIL-STD-348 AND
MIL-C-39012

NOTES:

- 1.0 MATERIAL:
 - 1.1 BODY AND INNER SLEEVE: CORROSION RESISTANT STEEL TYPE 304L, PER ASTM A582
 - 1.2 CONNECTORS: CORROSION RESISTANT STEEL PER MIL-STD-348 AND MIL-C-39012
 - 1.3 OUTER SLEEVE: CORROSION RESISTANT STEEL TYPE 303, PER QQ-S-764
- 2.0 FINISH:
 - 2.1 BODY: PASSIVATED PER QQ-P-35, TYPE II
 - 2.2 CONNECTORS: PASSIVATED IN ACCORDANCE WITH MIL-STD-348 AND MIL-C-39012
- 3.0 MARKING: BLACK EPOXY INK:

400-F219
1UJ73
J1 J2



SPECIFICATIONS

FREQUENCY RANGE: 1-2 GHz
 POWER: 200 WATTS MAX | MICROSECND 2W AVG
 INSERTION LOSS: 1.5 dB MAX
 VSWR: 1.5:1 MAX
 RECOVERY TIME: 1.5 MICROSECONDS
 FLAT LEAKAGE: 100 MW MAX

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF RH LABS AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEM(S) WITHOUT WRITTEN PERMISSION



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON FINISH: RMS63 ANGLES: ±1/2° FRACTIONS: ±1/64 3 PLACE DECIMALS: ± .010 2 PLACE DECIMALS: ± .01 1 PLACE DECIMALS: ± .1 FILLET: .005R MAX REMOVE BURRS AND SHARP EDGES TO .005 MAX. R OR CHAMFER	DRAFT	MRG	DATE	TITLE		
	CHKD	MRG	7-18-17	OUTLINE		
	PROD					
	ENGR			SIZE	CAGE CODE	DWG NO
QA			B	1UJ73	400-F219	
			SCALE	SHEET 1 OF 1		
			3X			

4

3

2

1