



REVISIONS				
ZONE	SYM	DESCRIPTION	DATE	APPROVED

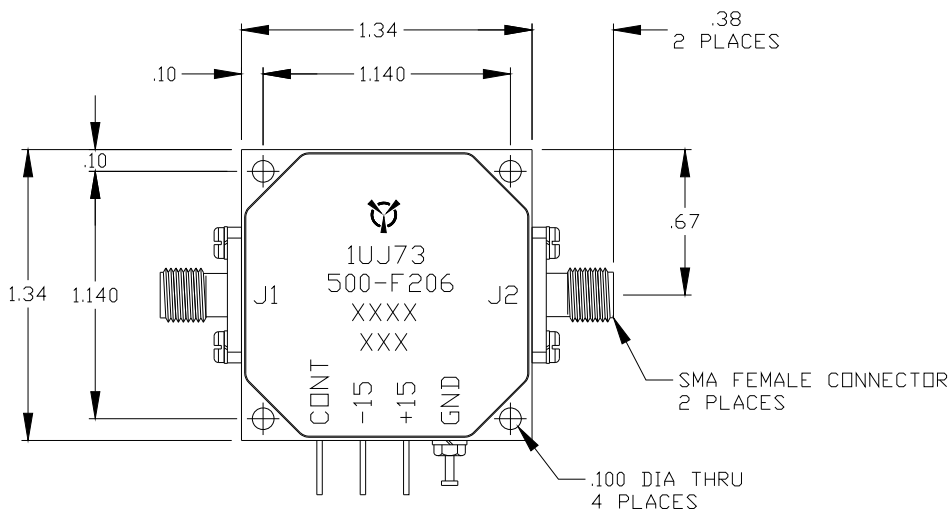

SPECIFICATIONS

FREQUENCY RANGE:	2.0-6.0 GHz
DYN RANGE:	60 dB
INSERTION LOSS:	2.5 dB MAX
FLATNESS:	+/-0.5 dB OR +/-4%
VSWR:	2.0:1 MAX
CONTROL VOLTAGE:	0 TO 10 VOLTS
INPUT IMPEDANCE:	10 K OHMS
LINEARITY:	+/- 1 dB MAX
SWITCHING TIME:	1.25 USEC MAX
TEMP STABILITY:	0.02 dB/°C MAX
RF POWER:	0 dBm
DC POWER:	+15 @ 130 MA MAX -15 @ 50 MA MAX

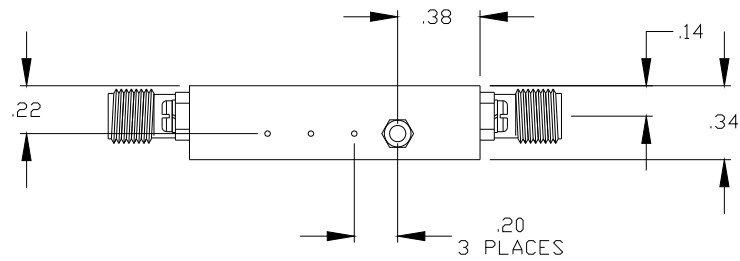

- NOTES:**
- FINISH: WASH PRIMER PER DDD-P-15328D
PRIMER PER MIL-P-23377D
PAINT PER MIL-C-22750
COLOR :BLUE
 - MARKING: BLACK EPOXY INK .08 HIGH CHARACTERS
PER MIL-STD- 130

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF RH LABS AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON FINISHES:
ANGLES: 1/2° FRACTIONS: ±1/64
3 PLACE DECIMALS: ±.005
2 PLACE DECIMALS: ±.01
1 PLACE DECIMALS: ±.1
FILLET: .005R MAX
REMOVE BURRS AND SHARP EDGES
TO .005 MAX. R OR CHAMFER

DRAFT	MRG	DATE	4-25-03
CHKD			
PRDD			
ENGR			
QA			

TITLE			2-6 GHz ATTENUATOR OUTLINE	
SIZE	CAGE CODE	DWG NO	500-F206	
B	1UJ73			
SCALE	2/1	SHEET 1 OF 1		



One Tanguay Avenue
Nashua, New Hampshire 03063-1711
Phone: 603-459-0127 • Fax: 603-459-0227
Email: Sales@RH-Labs.com