



| REVISIONS | | | | |
|-----------|-----|-------------|------|----------|
| ZONE | SYM | DESCRIPTION | DATE | APPROVED |
| | | | | |
| | | | | |
| | | | | |

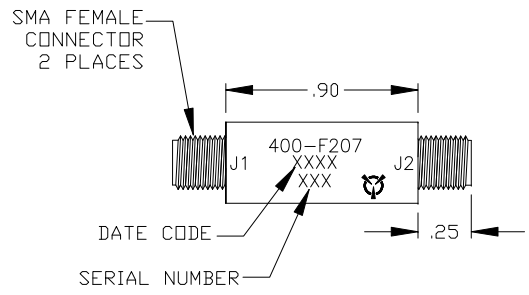

SPECIFICATIONS

FREQUENCY RANGE: 2-18.0 GHz

INSERTION LOSS: 2.8 dB MAX

LEAKAGE POWER: 20 mWATTS

PEAK POWER 300 WATTS

AVG POWER 2 WATTS

RECOVERY TIME 300 NANoseconds

- NOTES:
- FINISH: WASH PRIMER PER DOD-P-15328D
PRIMER PER MIL-P-23377D
PAINT PER MIL-C-22750
COLOR :BLUE
 - MARKING: BLACK EPOXY INK .06 HIGH PER MIL-STD- 130

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF RH LABS AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS) WITHOUT WRITTEN PERMISSION

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON FINISH: RMS63
ANGLES: 1/2" FRACTIONS: 1/64
3 PLACE DECIMALS: ± .010
2 PLACE DECIMALS: ± .02
1 PLACE DECIMALS: ± .1
FILLET: .005R MAX
REMOVE BURRS AND SHARP EDGES TO .005 MAX. R OR CHAMFER



| | | | | | |
|-------|--|-----|----------|-----------------|--------------|
| DRAFT | | DEC | DATE | TITLE | |
| CHKD | | | 12-17-02 | LIMITER OUTLINE | |
| PRD | | | | SIZE | CAGE CODE |
| ENGR | | | | B | 1UJ73 |
| QA | | | | DWG NO | 400-F207 |
| | | | | SCALE | 2/1 |
| | | | | | SHEET 1 OF 1 |



One Tanguay Avenue
Nashua, New Hampshire 03063-1711
Phone: 603-459-5900 • Fax: 603-459-5901
Email: Sales@RH-Labs.com